




## Sofia Induction Griddle 48"

FSRC 4807 P MI MK 2F G MBK



- Electronic multifunction ovens
- Pizza Pizzeria 350 °C function
- AirFry (oven-frying) function
- Pyrolytic self-cleaning ovens
- Fast pre-heat function
- Main oven with dual convection
- Ventilated accessory oven
- Meat Probe
- Cool touch soft-close door
- Creative Digital Control with knobs
- Glass-Ceramic Surface
- Metal knobs with stainless steel finish
- Pan Detection Sensore
- 7 Cooking Zones
- 1 Dual Max Power Zone Ø 28 cm
- Trilaminate Stainless Steel Griddle

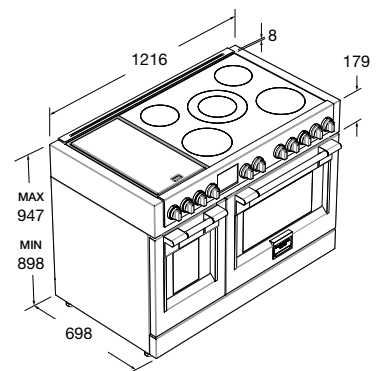

## Features

The SOFIA PRO 48 Induction represents the excellence of FULGOR MILANO, synonymous of the Italian style, mastery of design, and accuracy in craftsmanship. Discover our innovative 48" induction cooktop, an advanced electric solution for those who desire a traditional design with an integrated cooking surface. Thanks to its versatility, the triple-layer surface can be easily removed, revealing the underlying induction elements for an even more adjustable and high-performing cooking experience. The kitchen is equipped with two pyrolytic multifunction ovens, making this version a flexible tool that enhances the creative skills of professional chefs. The standard accessories for the main oven include a telescopic full-extension rack, two flat racks, a probe for food temperature measurement, a pizza set (round rack, pizza peel, and refractory stone), a glazed tray with splash-guard, and an AirFry tray. The auxiliary oven features a telescopic full-extension rack, two flat racks, and a stainless steel tray for AirFry.



MATTE BLACK

FSRC 4807 P MI MK 2F G MBK

EAN 8019801035151

# PROFESSIONAL

SOFIA 48" INDUCTION RANGE WITH GRIDDLE



FSRC 4807 P MI MK 2F G MBK			
Type / Aesthetic	Induction / Matte Black		
Interiors: enamel / other	Ultra Black Piro / -		
COOKING HOB			
Supply	Induction		
Surface	CeraBlack		
Trilaminare Teppanyaki Plate	•		
Pan Detector / Safety Lock	• / •		
Cooling with Fans	•		
Power Levels	1 - 9		
	Fusion function 45°C / Slow cooking at 70°C	Error code indicator	
	Booster for each zone	Residual heat release H	
	Automatic Heat Up	Minute Minder	
COOKING ZONES FEATURES			
Front left power (L9 - Booster) (W)	Ø 230 mm	2300 - 3700 W	
Rear left power (L9 - Booster) (W)	Ø 200 mm	1850 - 3000 W	
Dual Max power (L9 - Booster) (W)	Ø 280 mm	3000 - 5500 W	
Center power (L9 - Booster) (W)	Ø 200 mm	1850 - 2600 W	
Front right power (L9 - Booster) (W)	Ø 230 mm	2300 - 3700 W	
Rear right power (L9 - Booster) (W)	Ø 200 mm	1850 - 3000 W	
Bridge front and rear left (L9 - Booster) (W)	2x Ø 200 mm	2x 850 - 3000 W	
OVEN			
Type / Functions no.	Electronic Multifunction / 18		
Dual ventilation / Thermoventilated	Main / Secondary		
Energy efficiency class	A		
Capacity (liters)	125 + 65 L		
Forced cooling	•		
PERFORMANCE			
Max cooking temperature	290° C		
Pyrolysis temperature / Self-cleaning	460° C / •		
Pizza Pizzeria 350° function / AirFry	• / •		
CONTROLS			
Control system / Recipes	Creactive with knobs / •		
Automatic power off / Booster	• / •		
Meat Probe	Main oven		
SAFETY			
Door lock (during pyrolysis)	•		
Cool-touch door / no. of glass panes	• / 4		
Soft-close door	•		
ACCESSORIES			
Lighting (Halogen, 25 W) no.	3 + 2		
Flat racks / Telescopic rack no.	2 + 2 / 1 + 1		
Trays no. / type	1 / Enamelled tray		
Enamelled AirFry tray	1		
Stainless steel AirFry tray	1		
Round rack / Pizza shovel	1 / •		
Firestone for pizza no.	1		
POWER RATING			
Max electrical power (W)	21400 W		
Voltage / Frequency (V - Hz)	220 - 240 V / 380 - 415V 2 N ~ ; 50 - 60 Hz		
DIMENSIONS			
Width mm	1216		
Height (min - Max) mm	898 - 947		
Depth (mm)	698		