

24" GAS COOKTOP



MODEL CODE

MATTEO 100 SERIES

F1MGK24S1



Heavy-Duty Grates



Continuous Grate Surface



Dual-Flame Burner



Automatic Reignition System



Americans with Disabilities Act †

DESCRIPTION

The Matteo 100 Series 24" gas cooktop blends classic style with modern functionality, making it a perfect addition to any kitchen. High-quality aluminum burners provide efficient heating, while durable cast iron grates offer easy cleaning. With a continuous cooking surface, flexible burner layout, and automatic re-ignition for added safety, this cooktop delivers the performance and reliability that discerning cooks demand. Elevate your culinary space with this exceptional cooktop, where style and efficiency meet.

FEATURES

- 4 gas burners with 1 dual-flame burner (front-left)
- Aluminum burners
- Automatic re-ignition system
- Heavy-duty continuous cast iron grates
- Elegant brushed stainless steel cook top base
- Convertible to Liquid Propane

INCLUDED ACCESSORIES

- | | |
|-------------|-------------------|
| 41091255 | Installation Kit |
| 49000100543 | LP Conversion Kit |

OPTIONAL ACCESSORIES

- | | |
|-------|--------------|
| FMWOK | Wok Ring |
| FMSIM | Simmer Plate |

† To achieve full ADA compliance, please consult the current ADA requirements for product installation instructions.


24" GAS COOKTOP



MODEL CODE

MATTEO 100 SERIES

F1MGK24S1

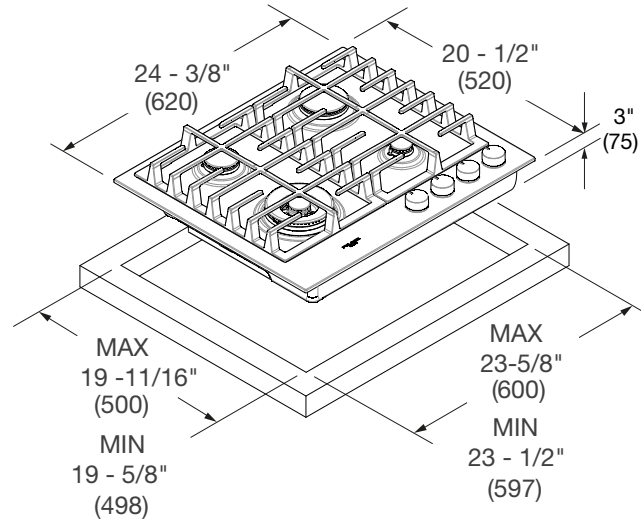

MODEL CODE	24" GAS COOKTOP F1MGK24S1	
GENERAL DETAILS		
Finish	Brushed Stainless Steel	
Control Type	Knobs	
Fuel Type	Gas (NG or LP)	
Heavy-Duty Cast Iron Grates	2	
Cooking Zones	4	
Sealed Burners	Yes	
DIMENSIONS / WEIGHT		
Product Width, in. (mm)	24-3/8	(620)
Product Height, in. (mm)	5-1/4	(132)
Product Depth, in. (mm)	20-1/2	(520)
Cutout Width (min-max), in. (mm)	23-1/2 - 23-5/8	(597 - 600)
Cutout Height (min), in. (mm)	3-3/8	(86)
Cutout Depth (min-max), in. (mm)	19-5/8 - 19-11/16	(498 - 500)
Net Weight, lbs. (kg)	27	(12)
POWER / RATINGS (120 V, 60 Hz)		
Power (min-max) (Front-L)	850 BTU/h (250 W) - 20000 BTU/h (5865 W)	
Power (min-max) (Front-R)	1000 BTU/h (295 W) - 4000 BTU/h (1175 W)	
Power (min-max) (Rear-L)	1300 BTU/h (380 W) - 8000 BTU/h (2350 W)	
Power (min-max) (Rear-R)	2200 BTU/h (645 W) - 12000 BTU/h (3520 W)	
TECHNICAL DETAILS		
Amperage Rating	0.1 A	
Maximum Power	44000 BTU/h (12900 W)	
Power Cable	3 Prong Nema 5 - 15P	
Power Cable Length, in. (mm)	51	(1300)
Electrical Circuit	120 V - 60 Hz - 15 A	
LP Kit Included	Yes	
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / French / Spanish	
WARRANTY		
Limited Warranty	Parts and Labor (2-year)	